




MBRP Muffler Installation Instructions

3060408

03-05 RX1 & Warrior

1. Remove exhaust end caps, taillight screws, and taillight cover. Pull taillight and housing off disconnecting the electrical connector for the light.
2. Remove all fasteners from the seat mounting studs and lift the seat off of the machine.
3. Removing the fuel tank:
 - a. To start remove all nuts fastening the tank to the frame.
 - b. Drain all fuel from the fuel tank
 - c. Remove left, and right side fuel tank covers
 - d. Disconnect the fuel level sender and both fuel lines from tank
 - e. Lift rear of fuel tank and slide towards the back of the machine.
 - f. Disconnect tank vent and remove fuel tank from sled.
4. Next remove the now visible exhaust pipe covers and heat shield
5. Remove muffler bolts and loosen exhaust clamps, now remove the muffler by pulling towards the rear of sled. NOTE: Due to limited area this can be very complicated. Shimmy the muffler while pulling back on it to help break it loose. Save the stock gaskets for use with MBRP Muffler.
6. Install your new MBRP muffler, and then complete steps 7 & 8 before working backwards through the above steps to complete your installation, reusing stock gaskets and clamps. Pay special attention to the alignment of the exhaust pipes to the flex pipes.
7. Install MBRP crossover to muffler using clamps supplied.
8. Minor adjustments may be required for proper fitment. Be sure to align all connections and tighten all fasteners and clamps before replacing the seat and tank.

It is recommended that you have your local snowmobile shop or Yamaha dealer install this system.

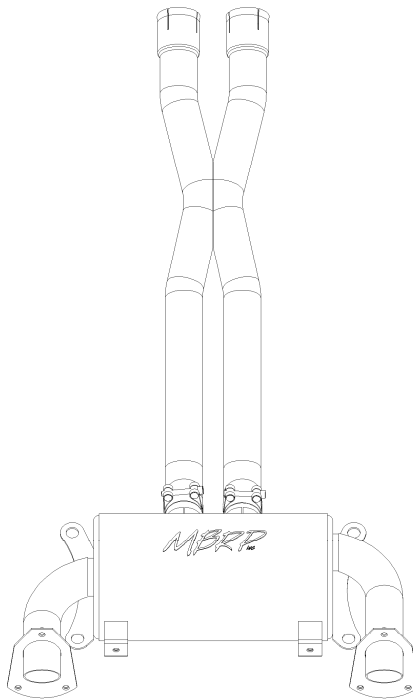

NOTE: To avoid exhaust leaks use high heat silicone to seal all connections between expansion chambers and muffler. Monitor for leaks during the first 200 miles after your installation and re-apply silicone where necessary. We suggest having your local snowmobile mechanic or performance shop install this product.

CAUTION: **DO NOT** touch muffler while snowmobile is running or shortly after it has run, as it may result in personal injury.

MBRP Inc warranty applies for a one (1) year period from the date of purchase to defects in product material and workmanship and is to the original purchaser on record and for the original vehicle for which it was designed and installed. This warranty is limited, at MBRP Inc.'s sole determination, to the repair or replacement of defective product only and does not include the cost of removal or re-installation, damage by accident, abuse, misuse or misapplication or any consequential damages however they may arise. Determination of warranty coverage shall be at the discretion of an authorized MBRP Inc quality engineer.