

MBRP

MBRP Muffler Installation Instructions


315T405

2011-2018

APEX (All Models)

Note: Local regulations may limit or prohibit modification to your snowmobile's emissions system and/or the sound levels that it generates. It is your responsibility to be aware of restrictions that may apply to your intended use of this product.

1. REMOVAL OF THE SEAT:
 - a. Open the flap into the storage area at the rear of the seat and unbolt the seat.
 - b. Unplug the tail light clip on the right side of the fuel tank and remove the tail like housing.
 - c. Lift the seat off of the machine
2. Remove the (4) bolts on the muffler shield and lift it off.
3. Remove the black plug and loosen the muffler clamp.
4. Remove the (4) muffler mounting bolts and pull the stock muffler off.
5. Transfer the grommets from the stock muffler onto the MBRP muffler.
6. Apply the high temperature silicone on the inlet of the MBRP muffler and install it with the barrel clamp.
7. Follow the instructions from step 1-4 in reverse to complete installation.

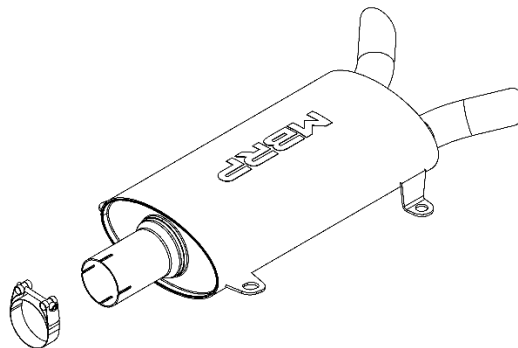

NOTE: To avoid exhaust leaks use a high heat silicone to seal all connections between the expansion chambers and the muffler. Monitor the exhaust for leaks during the first 200 miles after your installation and re-apply silicone where necessary. We suggest having your local snowmobile mechanic or performance shop install this product.

CAUTION: **DO NOT** touch the muffler while the snowmobile is running or shortly after it has run, as it may result in personal injury.

MBRP Ltd. warranty applies for a two (2) year period from the date of purchase to defects in product material and workmanship and is to the original purchaser on record and for the original vehicle for which it was designed and installed. This warranty is limited, at MBRP Ltd.'s sole determination, to the repair or replacement of defective product only and does not include the cost of removal or re-installation, damage by accident, abuse, misuse or misapplication or any consequential damages however they may arise. Determination of warranty coverage shall be at the discretion of an authorized MBRP Ltd. quality engineer.