



## **MBRP Muffler Installation Instructions**


**3100405**

**2006-2010 Yamaha Apex –Attack-GT-LTX-RTX**

**Will not fit Mountain sleds**

1. Remove exhaust end caps, taillight screws, and taillight cover. Pull taillight and housing off disconnecting the electrical connector for the light.
2. Remove all fasteners from the seat mounting studs and lift the seat of the machine.
3. Removing the fuel tank:
  - To start remove all nuts fastening the tank to the frame.
  - Drain all fuel from the fuel tank
  - Remove left, and right side fuel tank covers
  - Disconnect the fuel level sender and both fuel lines from tank
  - Remove upper fuel tank mount screws and nuts
  - Lift rear of fuel tank and slide towards the back of the machine.
  - Disconnect tank vent and remove fuel tank from sled.
4. Next remove the now visible exhaust pipe covers and heat shield
5. Remove muffler bolts and loosen exhaust clamps, now remove the muffler by pulling towards the rear of sled. NOTE: Due to limited area this can be very complicated. Shimmy the muffler while pulling back on it to help break it loose.
6. Install the MBRP stainless steel exhaust system by carefully working backwards through the above steps, reusing the stock gaskets and provided clamps. Minor adjustments may be required, pay special attention to the alignment of the exhaust pipes to the flex head pipes.
7. Ensure all fasteners are tightened before reinstalling the fuel tank and seat.

It is recommended to have your local snowmobile shop or Yamaha dealer install this system.

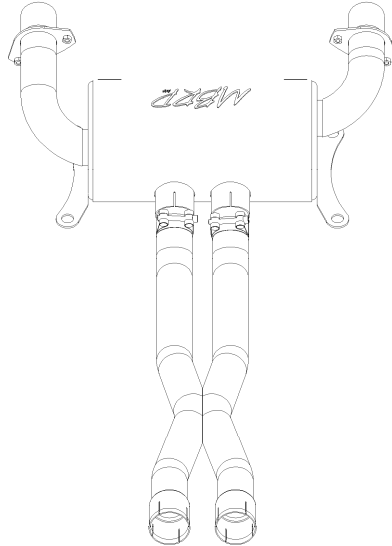

NOTE: To avoid exhaust leaks use high heat silicone to seal all connections between expansion chambers and muffler. Monitor for leaks during the first 200 miles after your installation and re-apply silicone where necessary. We suggest having your local snowmobile mechanic or performance shop install this product.

CAUTION: **DO NOT** touch muffler while snowmobile is running or shortly after it has run, as it may result in personal injury.

MBRP Inc warranty applies for a one (1) year period from the date of purchase to defects in product material and workmanship and is to the original purchaser on record and for the original vehicle for which it was designed and installed. This warranty is limited, at MBRP Inc.'s sole determination, to the repair or replacement of defective product only and does not include the cost of removal or re-installation, damage by accident, abuse, misuse or misapplication or any consequential damages however they may arise. Determination of warranty coverage shall be at the discretion of an authorized MBRP Inc quality engineer.