




MBRP Muffler Installation Instructions

3120000

2006-2010 Yamaha Apex all models

1. Remove exhaust end caps, taillight screws, and taillight cover. Pull taillight and housing off disconnecting the electrical connector for the light.
2. Remove all fasteners from the seat mounting studs and lift the seat of the machine.
3. Removing the fuel tank:
 - To start remove all nuts fastening the tank to the frame.
 - Drain all fuel from the fuel tank
 - Remove left, and right side fuel tank covers
 - Disconnect the fuel level sender and both fuel lines from tank
 - Lift rear of fuel tank and slide towards the back of the machine.
 - Disconnect tank vent and remove fuel tank from sled.
4. Next remove the now visible exhaust pipe covers and heat shield
5. Remove muffler bolts and loosen exhaust clamps, now remove the muffler by pulling towards the rear of sled. NOTE: Due to limited area this can be very complicated. Shimmy the muffler while pulling back on it to help break it loose.
6. Loosen the y-pipe clamps (5mm Allen wrench) and remove the two Allen head bolts holding the y-pipes in place.
7. Remove the 4 exhaust joints from the engine (10mm socket required), and slide y-pipes forward.
8. Lastly raise the rear of the sled and remove the two rear suspension bolts. This will allow you access required to remove the stock y-pipes.
9. Install the MBRP stainless steel y-pipes by carefully working backwards through the above steps, reusing the stock gaskets and clamps. Pay special attention to the alignment of the exhaust pipes to the flex head pipes.

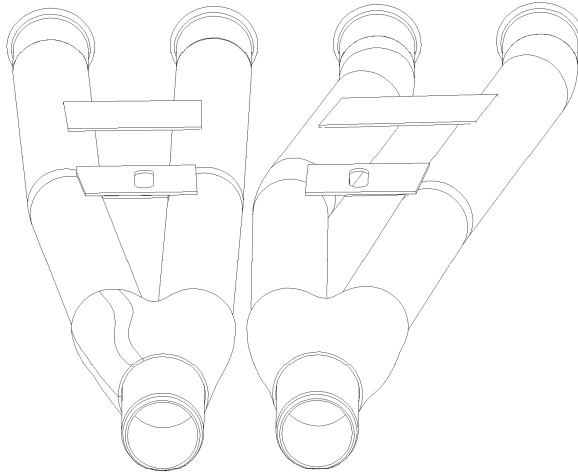

It is highly recommended you have your local Yamaha dealer or snowmobile shop install this system for you.

NOTE: To avoid exhaust leaks use high heat silicone to seal all connections between expansion chambers and muffler. Monitor for leaks during the first 200 miles after your installation and re-apply silicone where necessary. We suggest having your local snowmobile mechanic or performance shop install this product.

CAUTION: **DO NOT** touch muffler while snowmobile is running or shortly after it has run, as it may result in personal injury.

MBRP Inc warranty applies for a one (1) year period from the date of purchase to defects in product material and workmanship and is to the original purchaser on record and for the original vehicle for which it was designed and installed. This warranty is limited, at MBRP Inc.'s sole determination, to the repair or replacement of defective product only and does not include the cost of removal or re-installation, damage by accident, abuse, misuse or misapplication or any consequential damages however they may arise. Determination of warranty coverage shall be at the discretion of an authorized MBRP Inc quality engineer.